


# BIG-SCREW EZ TIE-DOWN



## INSTRUCTIONS

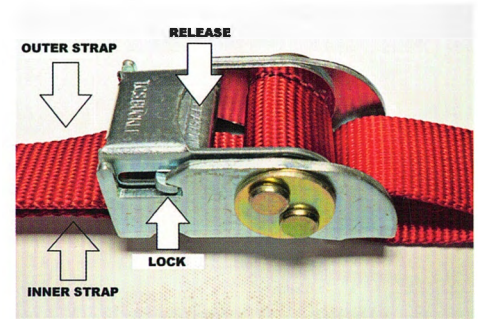

- 1- Insert the screw tip vertically into the ground. Pressing downward, rotate the screw clockwise using a 1-inch ratchet, socket or portable impact wrench until the collar is flush with the ground
- 2- Secure the double S-Hooks on the attachment strap to the aircraft tie-down point
- 3- Open the strap lock by pressing down the release button and opening the locking lever
- 4- Attach the steel clip on the end of the strap to the screws webbing loop. The steel clips spring gate pulls open outward
- 5- Remove the slack from the webbing by pulling the front strap downward to lightly snug
- 6- Close the strap locking lever until it clicks and locks in place. This will also tighten the strap by one inch. The lever must be fully closed and locked for the strap to be secure

**See FAA Advisory Circular AC 20-35C for recommended ground anchor placement**