


Making a good point about recovering the FSG2T e.g. after a handling error

5.2 Operator's Controls



5.6 Reset

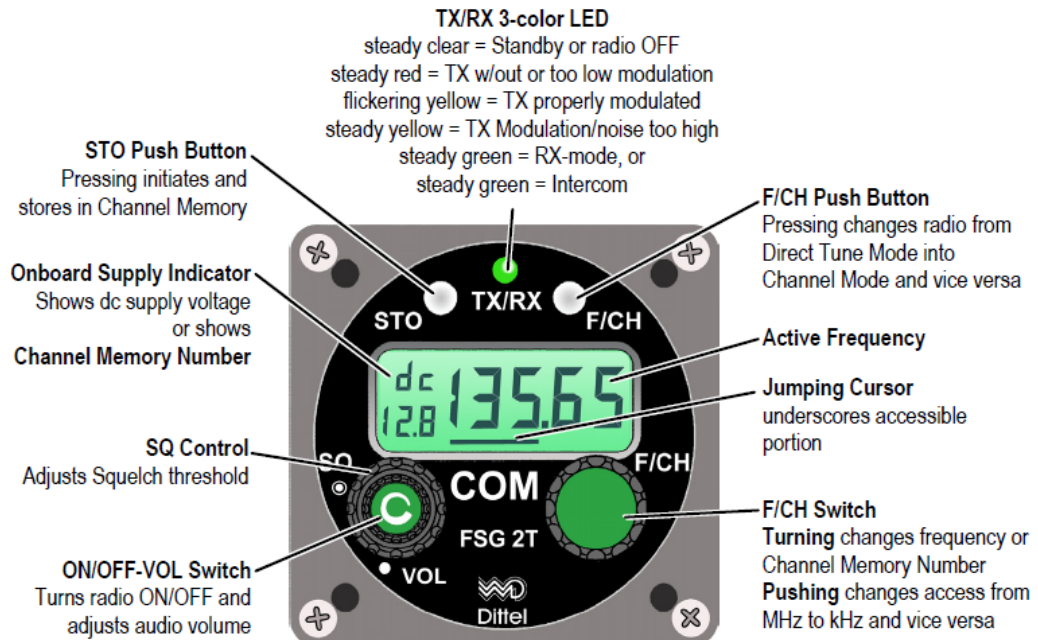

CAUTION!

- **Every RESET to the factory setting deletes all your pre-set memory channels!**

To reset the transceiver proceed as follows:

- Turn OFF the radio (VOL knob fully ccw).
- **For a few seconds PUSH and HOLD simultaneously the buttons F/CH and STO, then turn ON the radio** (rotate VOL knob clockwise, approximately mid position).
- All segments of the display appear for a short moment.
- Wait till the firmware version is displayed.
- Release both buttons.
- While in the DIRECT TUNE MODE the last used frequency remains.
- While in the CHANNEL MODE the last used memory channel shows "118.00 MHz". All other memory channels of the **FSG 2T** are set to 118.00 MHz as well.